



AGR-751	
ACG-751	

AGR-752	
ACG-752	

mod.	rango range	largo length (mm)	alto height (mm)	fondo depth (mm)	potencia frig. frig. power (W)	consumo consumption (W)	capacidad capacity (L)	estantes shelves	pares de guías sets of slides	tensión monofásica single phase voltage	refrigerante coolant
AGR-750	-2°C+8°C	695	2130	840	356	430	610	3	3	230V - 50 Hz	R-134a
ACG-750	-20°C-15°C	695	2130	840	450	840	610	3	3	230V - 50 Hz	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores GN 2/1, de alambre en acero plastificado, regulables en altura
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Control digital de temperatura y descarches
- Temperatura de trabajo a 38°C ambiente

We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Key lock as standard
- Inner side of doors by stamped steel
- Interior LED lighting
- GN 2/1 shelves made of plasticized steel wire, height adjustable
- AISI -304 adjustable legs, 135 to 210 mm
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption
- Operating temperature 38°C ambient


REFRIGERATED COUNERS • ARMARIOS REFRIGERADOS

### Opciones - Options

parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
hidrocarburo	hydrocarbon



pre-instalación    remote compressor

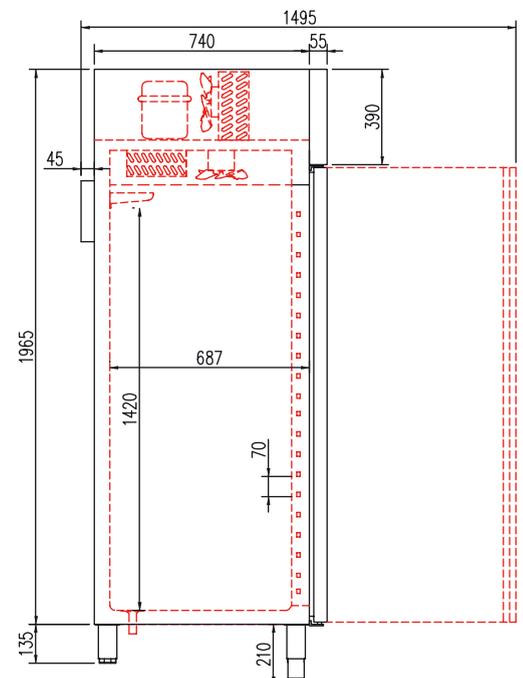


## Armario GN 2/1, refrigeración y congelados GN 2/1 cabinet, chiller and freezer

*all photos must be considered as a reference - fotografías no contractuales*



AGR-751

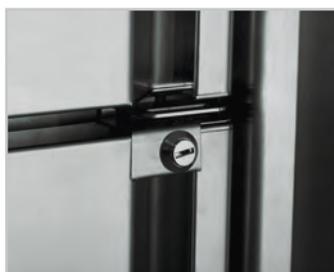

ARMARIOS  
REFRIGERADOS