



CMI-5-70	
CMI-5-100	
CMI-5-125	
CMI-5-150	
CMI-5-190	
CMI-5-240	
CMI-5-290	

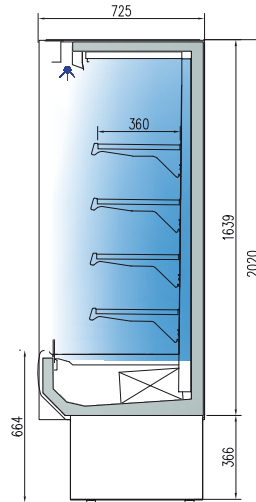

CMI-6-70	
CMI-6-100	
CMI-6-125	
CMI-6-150	
CMI-6-190	
CMI-6-240	
CMI-6-290	

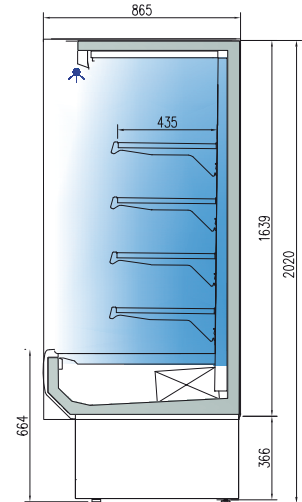

CMI-8-70	
CMI-8-100	
CMI-8-125	
CMI-8-150	
CMI-8-190	
CMI-8-240	
CMI-8-290	

### Características técnicas - Technical data

ref.	largo length (mm)	exposición display (m <sup>2</sup> ) CMI-5	exposición display (m <sup>2</sup> ) CMI-6	exposición display (m <sup>2</sup> ) CMI-8	estantes shelves (uds) CMI-5-6-8	potencia frig. power (W) CMI-5-6-8	consumo. consumption (W) CMI-5-6-8	refrigerante coolant	rango range (°C)
CMI-70	680	0,76	0,86	1,01	4	1215	1626	R-404A	-1 +5
CMI-100	970	1,08	1,23	1,45	4	1497	1808	R-404A	-1 +5
CMI-125	1220	1,37	1,56	1,84	4	1497	1820	R-404A	-1 +5
CMI-150	1480	1,68	1,91	2,25	4	2878	2410	R-404A	-1 +5
CMI-190	1880	2,14	2,43	2,86	8	2878	2565	R-404A	-1 +5
CMI-240	2380	2,72	3,10	3,65	8	3116	3640	R-404A	-1 +5
CMI-290	2900	2,81	3,24	3,82	8	5756	4820	R-404A	-1 +5

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

Vitrinas polivalentes, preparadas para carnes, lácteos y verduras regulando parámetros de la centralita digital

- Exterior e interior en acero inox AISI-304, con cristal lateral
  - **De serie:** luz superior fluorescente T8 y cortina nocturna
  - Costados de 30 mm
  - Perfilería en aluminio anodizado
  - Paragolpes en la parte delantera
  - Estantes regulables en altura y ángulo, con porta-precios
  - Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
  - Evaporador ventilado, con tratamiento EPOXY anti-corrosión de serie
  - Descarcho automático con evaporación automática
  - Condensación ventilada
  - Control electrónico de temperatura
  - Indicador de temperatura
  - Clase climática 3 ( 25°C 60%Hr) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

All multideck are versatile and changing digital control parameters, are ready for meat, milk products and vegetables

- AISI 304 exterior and interior, with glass sides
  - **Standard:** top T8 fluorescent lighting and night blind
  - 30 mm thicknes sides
  - Anodised aluminium profiles
  - Front rubber bumper
  - Height and angle adjustable shelves, with labels holder
  - 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
  - Ventilated evaporator, with EPOXY anticorrosion cover as sta dard
  - Auto defrost and automatic evaporation
  - Ventilated condensation
  - Electronic temperature controller
  - External thermometer
  - Climate class 3 (25°C 60%Hr) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

### Opciones - Options

ref.	puertas cristal simple single glass door	iluminación T5 en todos los estantes T5 all shelves lighting	iluminación estante LED LED shelfe lighting	pre-instalación remote condenser unit
CM-70				
CM-100				
CM-125				
CM-150				
CM-190				
CM-240				
CM-290				

Versión REMOTO, incluye válvula de expansión (404A) y valvula solenoide  
REMOTE version, expansion valve (404A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora MURAL INOX serie 5 - 6 - 8  
5 - 6 - 8 series MULTIDECK INOX display

*all photos must be considered as a reference - fotografías no contractuales*



CMI-6-100

Efficiencia energética - Energy efficiency



Puertas cristal opcionales  
Optional glass doors