


CVE-8-10-R
CVE-8-13-R
CVE-8-15-R
CVE-8-20-R
CVE-8-25-R
CVE-8-30-R

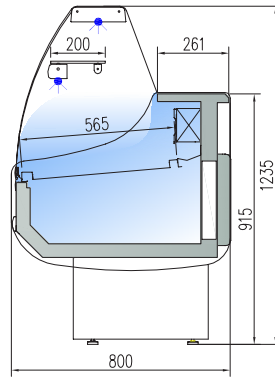

CVE-8-10-C
CVE-8-13-C
CVE-8-15-C
CVE-8-20-C
CVE-8-25-C
CVE-8-30-C

mod.	largo length (mm)	exposición display (m ²)	reserva cold storage (m ³)	puertas doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
CVE-8-10	1055	0,54	0,28	1	522	397	R-452A
CVE-8-13	1305	0,68	0,37	2	522	921	R-452A
CVE-8-15	1525	0,80	0,43	2	635	1019	R-452A
CVE-8-20	2025	1,08	0,57	3	817	1069	R-452A
CVE-8-25	2525	1,36	0,72	4	1096	1394	R-452A
CVE-8-30	2995	1,63	1,12	4	1096	1354	R-452A

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications without prior notice

- Exterior e interior en chapa de acero plastificada
 - Plano exposición y encimera en acero inox AISI-304
 - Bandejas plano de exposición lisas, con escalón al mismo precio
 - Costados de 40 mm en ABS inyectado excepto acabado madera
 - **Decoración estándar:** costados cortos gris oscuro frontal gris + franja decorativa azul. Periferia en aluminio anodizado
 - Paragolpes en la parte delantera
 - Cristal frontal templado, abatible
 - Estante de cristal intermedio, no refrigerado
 - Iluminación LED 6500 K estándar: encimera superior y estante
 - Opción LED 3000 K (luz cálida) o ROSA, al mismo precio
 - Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
 - Reserva refrigerada con puertas, hueco 440x270
 - **Evaporador estático**, con tratamiento EPOXY anti-corrosión
 - Condensación ventilada, evaporación automática de serie (sólo con motor incorporado)
 - Control electrónico de temperatura
 - Indicador de temperatura
 - Descarche automático
 - Clase climática 4 (30°C 55%) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

- Interior and exterior finish in plastic coated steel
 - Display area and counter in stainless steel AISI-304
 - Smooth deck for display area, stepped at same price
 - 40 mm sides in injected ABS, except wood decor
 - Anodised aluminium profiles
 - **Standard decoration:** short dark gray sides gray front+ blue decorative stripe
 - Front rubber bumper
 - Tempered and hinged front glass
 - Glass shelf non refrigerated
 - Standard LED 6500 K lighting: top worktop and shelf
 - Optional 3000 K LED (soft light) or Fresh red, same price
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Refrigerated under storage with doors 440x270
 - **Static evaporator**, with anticorrosion EPOXY treated as standard
 - Ventilated condensation and automatic evaporation as standard (only models with condenser unit)
 - Electronic temperature controller
 - External thermometer
 - Auto defrost
 - Climate class 4 (30°C 55%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006


SERVE OVER COUNTER • VITRINAS MODULARES

OPCIONES OPTIONS	decoración frontal decor	decoración total decor	lacado alto brillo High glossy lacquered	cierre plexi plexi doors	cierre cortina night blind	luz extra LED extra lighting	neutra neutral	remoto remote
CVE-8-10								
CVE-8-13								
CVE-8-15								
CVE-8-20								
CVE-8-25								
CVE-8-30								

Versión REMOTO, incluye válvula de expansión (404a) y valvula solenoide
 REMOTE version, expansion valve (404A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

all photos must be considered as a reference - fotografías no contractuales



DE SERIE
 STANDAR



CVE-8-20-C
 decoración estándar
 standard front side finish




CVE-8-20-C
 frontal inox
 stainless steel decor



lacado
 lacquered



madera
 wood

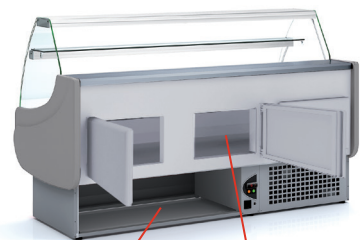

opcional interior 440x270