




MFEI60-150  
MFEI70-135



MFEI60-200  
MFEI70-180



MFEI70-225



MFEI70-270

Cubetas GN y perfiles divisorios NO incluidos en el precio, ver página 442  
GN containers and dividers NOT included in price, see page 442

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves	pares guías slides sets	capacidad GN GN capacity 1/4	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W
MFEI60-150	0°C +8°C	1495	850	600	2	0	8	245	230V-50Hz	R134a	304	322
										R290*	502	264
MFEI60-200	0°C +8°C	2020	850	600	3	0	12	380	230V-50Hz	R134a	485	511
										R290*	820	592
MFEI70-135	0°C +8°C	1345	850	700	2	2	8	255	230V-50Hz	R134a	304	322
										R290*	502	264
MFEI70-180	0°C +8°C	1795	850	700	3	3	10	399	230V-50Hz	R134a	485	511
										R290*	820	592
MFEI70-225	0°C +8°C	2245	850	700	4	4	13	543	230V-50Hz	R134a	485	511
										R290*	820	592
MFEI70-270	0°C +8°C	2695	850	700	5	5	16	686	230V-50Hz	R134a	485	567
										R290*	820	648

\*opcional - optional

FAST & COOL FOOD

Características técnicas y constructivas sujetas a variación sin previo aviso.

- **MFEI60** estantes interiores de alambre en acero plastificado, regulables en altura, sobre apoyos inox
- **MFEI70** estantes interiores GN 1/1 de alambre en acero plastificado, sobre guías de acero inox regulables en altura
- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Encimera inox con expositor de ingredientes integrado y cubierta inox abatible
- Expositor ingredientes GN 1/4-150
- Pies en tubo de acero inox ajustables en altura 135 - 210 mm
- Unidad condensadora ventilada y extraíble
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo a 32°C ambiente

We reserve the right to change specifications without prior notice.


- **MFEI60** shelves made of plasticized steel wire, height adjustable
- **MFEI70** GN 1/1 shelves made of plasticized steel wire, height adjustable
- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- Stainless steel worktop, integrated topping unit with inged lid,
- GN 1/4-150 topping unit
- AISI -304 adjustable legs, 135 to 210 mm
- Removable and fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating.
- Automatic evaporation of defrost water
- 40 Kg/m<sup>3</sup> density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature, 32°C ambient



cajones opcionales  
drawers on demand


OPCIONES	OPTIONS	€
cerradura puerta inox	solid door lock	
motor lado izquierdo	left side engine	
set 4 ruedas	4 castors set	
set 6 ruedas	6 castors set	
cambio R134a por R290	R134a to R290	
registrador de alarmas HACCP	HACCP alarm recorder	
encimera de granito	granite worktop	
respaldo inox	stainless steel rear side	
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz	
<b>MFEI-70</b>		
cajonera doble inox, auto-cierre	double drawers set, soft-closing	
cajonera triple inox, auto-cierre	triple drawers set, soft-closing	

Encimeras, alojamientos para cubetas y cubiertas, se pueden fabricar a medida.  
Worktops, container fits and covers, can be customized.

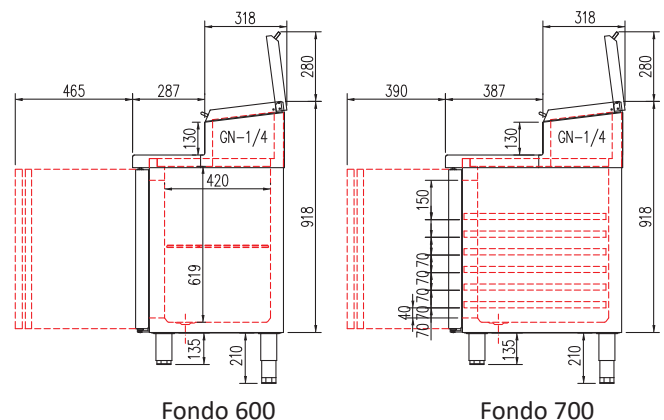

all photos must be considered as a reference - fotografías no contractuales

evaporador central  
double fan evaporator

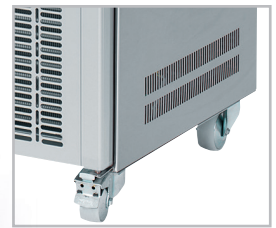

MFEI60-150



GN 1/4

encimera granito  
opcional  
optional granite  
worktop

MFEI70-180  
encimera de granito (opcional)  
granite worktop (option)

