


VSSAM-6-6-C	
VSSAM-6-9-C	
VSSAM-6-13-C	
VSSAM-6-16-C	
VSSA-6-6-C	
VSSA-6-9-C	
VSSA-6-13-C	
VSSA-6-16-C	

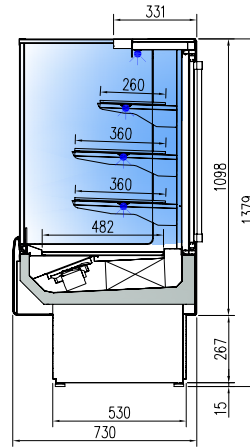

VSSAM-6-6-R	
VSSAM-6-9-R	
VSSAM-6-13-R	
VSSAM-6-16-R	
VSSA-6-6-R	
VSSA-6-9-R	
VSSA-6-13-R	
VSSA-6-16-R	

Características técnicas - Technical data

ref.	largo length (mm)	fondo depth (mm)	alto height (mm)	exposición display (m²)	puertas corredera sliding doors (uds)	puertas abatibles hinged doors (uds)	potencia frig. frig. power (W)	consumo consumption (W)	rango range	refrigerante coolant
VSSAM-6-6	600	730	1380	0,3	-	-	865	1176	+2°C+8°C	R-404A
VSSAM-6-9	950	730	1380	0,47	-	-	1038	1355	+2°C+8°C	R-404A
VSSAM-6-13	1300	730	1380	0,65	-	-	1038	1730	+2°C+8°C	R-404A
VSSAM-6-16	1650	730	1380	0,82	-	-	1497	2020	+2°C+8°C	R-404A
VSSA-6-6	600	730	1380	0,3	0	1	865	1176	+14°C+17°C	R-404A
VSSA-6-9	950	730	1380	0,47	2	0	1038	1355	+14°C+17°C	R-404A
VSSA-6-13	1300	730	1380	0,65	2	0	1038	1730	+14°C+17°C	R-404A
VSSA-6-13	1650	730	1380	0,82	2	0	1497	2020	+14°C+17°C	R-404A

Características técnicas y constructivas sujetas a variación sin previo aviso

VSSA vitrina refrigerada autoservicio puertas traseras

VSSAM vitrina refrigerada autoservicio

- Exterior fabricado en chapa de acero plastificada, lacada o inox
- Costados en ABS inyectado
- Interior en acero inoxidable AISI-304 18/10.
- Cristal doble: laterales y puertas
- Perfilera en aluminio anodizado
- Estantes de cristal regulables en altura, con iluminación LED
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado
- Descarche automático con evaporación automática
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Clase climática 3 (25°C 60%Hr) régimen M1

Todos los modelos se pueden personalizar en decoración
Cualquier decoración incluida en el precio, excepto alto brillo y metalizados

230v 60Hz / 115v 60Hz consultar - consult



Disponible acabados de la carta NCS o RAL, incluidos en el precio estándar, excepto alto brillo y metalizados.

Available finish included in NCS or RAL color chart, at the same price, except glossy and metallic finishing

We reserve the right to change specifications without prior notice

VSSA snacks refrigerated selfservice, rear side doors

VSSAM snacks refrigerated selfservice

- External finish in plastic coated steel, lacquered or stainless steel
- Sides in ABS injected
- Internal finish in AISI-304 18/10 stainless steel
- Double glazed: sides and doors
- Anodised aluminium profiles
- Height adjustable glass shelves, with LED lighting
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator
- Auto defrost and automatic evaporation
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Climate class 3 (25°C 60%Hr) regime M1


All models can be customized in decoration

All decorations are included on price, except glossy or melic finishing



Vitrina expositora autoservicio serie STAR SNACK
STAR SNACK self-service modular display

all photos must be considered as a reference - fotografías no contractuales



DE SERIE
STANDAR



VSSA-6-13-R



VSSAM-6-13-C