


EGR-751-PF
ECG-751-PF

EGRE-751-PF
ECGE-751-PF

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 2/1	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
EGR-751-PF	-2°C +8°C	680	2130	860	3	533	230V-50Hz	R290	502	182	A	5 40°C 40%
ECG-751-PF	-20°C -15°C	680	2130	860	3	533	230V-50Hz	R290	495	369	D	5 40°C 40%
EGRE-751-PF	-2°C +8°C	680	2130	860	4	533	230V-50Hz	R290	502	182	-	4 30°C 55%
ECGE-751-PF	-20°C -15°C	680	2130	860	4	533	230V-50Hz	R290	495	369	-	4 30°C 55%

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 22 embuticiones para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Estantes parrilla reforzados GN 2/1, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Poliuretano inyectado, densidad 40 Kg/m³, cero GWP y cero ODP.
- **75 mm** aislamiento perimetral
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía


We reserve the right to change specifications without prior notice.

- AISI-304 stainless steel exterior, rear side galvanized panel
- AISI-304 stainless steel interior, stamped bottom and rounded corners
- AISI-304 stainless steel inner sides, 22 press-formed supports for GN 2/1 - GN 1/1 containers or shelves
- Inner side of doors by stamped steel
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Key lock as standard
- LED lighting
- Reinforced GN 2/1 shelves made of plasticized steel
- AISI-304 adjustable legs, 135 to 200 mm
- Hinged front control panel
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane, zero GWP and zero ODP
- **75 mm** perimetral insulation
- Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption

CABINETS • ARMARIOS REFRIGERADOS

- EGR / ECG:** Puerta inox - solid door
EGRE: Puerta doble cristal - double glazed door
ECGE: Puerta triple cristal - triple glazed door

OPCIONES	OPTIONS
parrilla adicional GN 2/1	GN 2/1 extra shelf
barras carniceras	bars for meat set
set 4 ruedas	4 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

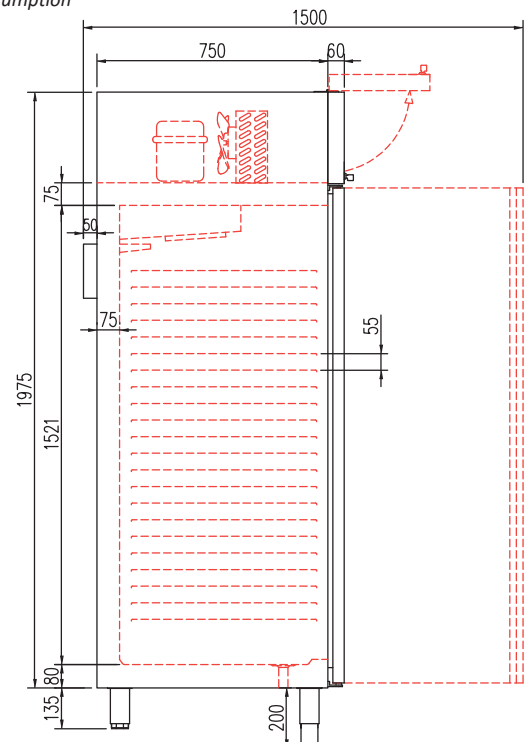

all photos must be considered as a reference - fotografías no contractuales



EGR-751-PF

Electrónica avanzada
High technology electronic system



Interior redondeado con desagüe
Rounded corners

