



AGR-1002-PF  
ACG-1002-PF



AGR-1003-PF  
ACG-1003-PF



AGR-1004-PF  
ACG-1004-PF

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 2/1	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
AGR-1000-PF	-2°C +8°C	1370	2130	860	6	1404	230V-50Hz	R134a*	485	442	D	5 40°C 40%
								R290	845	373	D	5 40°C 40%
ACG-1000-PF	-20°C -15°C	1370	2130	860	6	1404	230V-50Hz	R290*	907	952	D	4 30°C 55%
								R452A	1042	991	E	4 30°C 55%

\*opcional - optional


Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Costados en acero inox AISI-304-con 22 embuticiones + guías para apoyo de parrillas y cubetas GN 1/1 o GN 2/1
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Cerradura con llave, de serie
- Luz interior LED
- Estantes parrilla reforzados GN 2/1, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche del evaporador
- Poliuretano inyectado, densidad 40 Kg/m<sup>3</sup>, cero GWP y cero ODP.
- **75 mm** aislamiento perimetral
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: **AGR 40°C ACG 32°C**

We reserve the right to change specifications without prior notice.

- *AISI-304 stainless steel exterior, rear side galvanized panel*
- *AISI-304 stainless steel interior, stamped bottom and rounded corners*
- *AISI-304 stainless steel inner sides, 22 press-formed supports + slides for GN 2/1 - 1/1 containers or shelves*
- *Inner side of doors by stamped steel*
- *Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense*
- *Key lock as standard*
- *LED lighting*
- *Reinforced GN 2/1 shelves made of plasticized steel*
- *AISI -304 adjustable legs, 135 to 200 mm*
- *Hinged front control panel*
- *Fan assisted condenser unit*
- *Fan assisted evaporator, with epoxi anticorrosion coating*
- *Evaporator fan stops when door is opened*
- *Automatic evaporation of defrost water*
- *40 Kg/m<sup>3</sup> density polyurethane, zero GWP and zero ODP*
- *75 mm perimetral insulation*
- *Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption*

OPCIONES	OPTIONS
parrilla adicional GN 2/1 + guía	GN 2/1 extra shelf + slide
guía adicional GN 2/1	GN 2/1 extra slide
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)

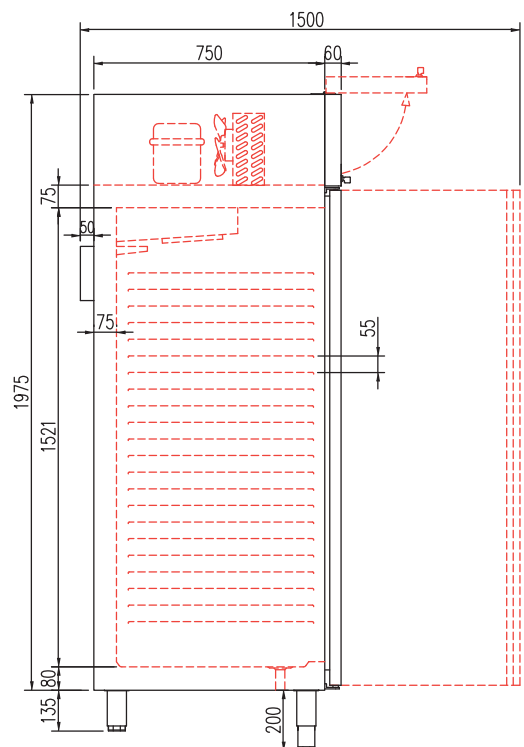

all photos must be considered as a reference - fotografías no contractuales



AGR-1002-PF

