



AGR-2003
 ACG-2003



AGR-2004
 ACG-2004



AGR-2005
 ACG-2005



AGR-2006
 ACG-2006

mod.	rango range °C	largo length (mm)	alto height (mm)	fondo depth (mm)	estantes shelves GN 2/1	pares guías slides sets	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
AGR-2000	-2°C +8°C	2055	2130	860	9	9	2197	230V-50Hz	R290	1702	897	D	5 40°C 40%
									R452A*	1215	894	E	5 40°C 40%
ACG-2000	-20°C -15°C	2055	2130	860	9	9	2197	230V-50Hz	R290	1814	1680	E	4 30°C 55%
									R452A*	1235	1510	E	4 30°C 55%

*opcional - optional

Características técnicas y constructivas sujetas a variación sin previo aviso.


- Exterior en acero inox AISI-304, excepto el respaldo
- Interior en acero inox AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Cerradura con llave, de serie
- Contrapuerta inox embutida
- Luz interior LED
- Estantes parrilla reforzados GN 2/1, de acero plastificado
- Pies en tubo de acero inox ajustables en altura 135 - 200 mm
- Cuadro de mandos elevable
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- **75 mm** aislamiento perimetral
- Control digital de temperatura, descarches optimizados, alarma por puerta abierta y alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo: **AGR 40°C ACG 32°C**

We reserve the right to change specifications without prior notice.

- *AISI-304 stainless steel exterior, rear side galvanized panel*
- *AISI-304 stainless steel interior, stamped bottom and rounded corners*
- *Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense*
- *Key lock as standard*
- *Inner side of doors by stamped steel*
- *Interior LED lighting*
- *Reinforced GN 2/1 shelves made of plasticized steel*
- *AISI -304 adjustable legs, 135 to 200 mm*
- *Liftable control panel*
- *Fan assisted condenser unit*
- *Fan assisted evaporator, with epoxi anticorrosion coating*
- *Evaporator fan stops when door is opened*
- *Automatic evaporation of defrost water*
- *40 Kg/m³ density polyurethane, zero ODP and GWP*
- *75 mm perimetral insulation*
- *Digital temperature control, optimized defrost, door open and high-temperature condensation alarms. Efficient management of energy consumption*
- *Operating ambient temperature AGR 40°C ACG 32°*

CABINETS • ARMARIOS REFRIGERADOS

OPCIONES	OPTIONS
parrilla adicional GN 2/1	GN 2/1 extra shelf
set adicional guías GN 2/1	GN 2/1 slides extra set
barras carniceras	bars for meat set
set 6 ruedas	6 castors set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
cambio R290 por R452A	R290 to R452A
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz

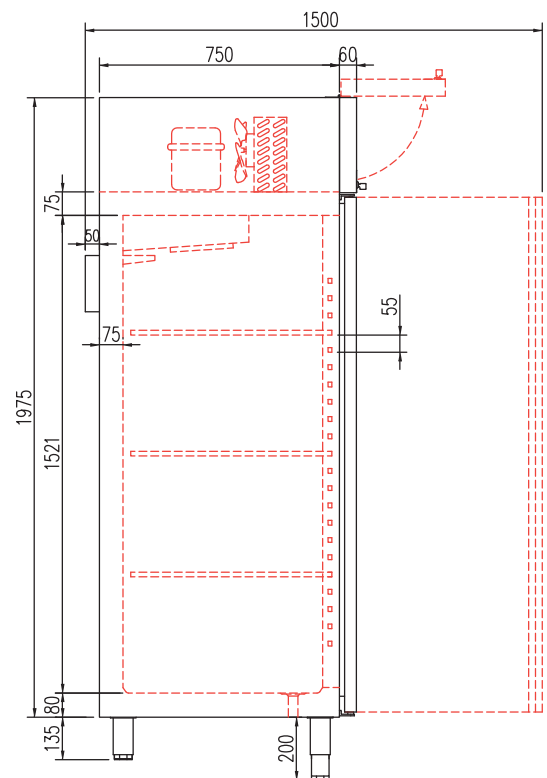

all photos must be considered as a reference - fotografías no contractuales



ACG-2003

