



UPR-27
UPL-27



UPR-55
UPL-55



UPR-82
UPL-82



mod.	rango range	largo length (mm) (inch)	alto height (mm) (inch)	fondo depth (mm) (inch)	estantes shelves uds	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	CCE EEC 2015/1094 EN16825	clase climate 2015/1094 EN16825
UPR-27	-2°C +8°C	28°F 46°F	660 26	2160 85 1/32	845 33 1/4	3	645	230V-50Hz	R134a*	245	253	E 5 40°C 40%
									R290	502	243	C 5 40°C 40%
UPR-55	-2°C +8°C	28°F 46°F	1350 56 1/16	2160 85 1/32	845 33 1/4	6	1404	230V-50Hz	R134a*	485	442	E 5 40°C 40%
									R290	845	373	D 5 40°C 40%
UPR-82	-2°C +8°C	28°F 46°F	2055 81	2160 85 1/32	845 33 1/4	9	2197	230V-50Hz	R290	1702	897	D 5 40°C 40%
									R452A*	1215	894	E 5 40°C 40%
UPL-27	-20°C -15°C	-4°F +5°F	660 26	2160 85 1/32	845 33 1/4	3	645	230V-50Hz	R290	606	546	E 5 40°C 40%
									R452A*	452	620	E 5 40°C 40%
UPL-55	-20°C -15°C	-4°F +5°F	1350 56 1/16	2160 85 1/32	845 33 1/4	6	1404	230V-50Hz	R290	907	952	E 5 40°C 40%
									R452A*	1042	990	E 5 40°C 40%
UPL-82	-20°C -15°C	-4°F +5°F	2055 81	2160 85 1/32	845 33 1/4	6	1404	230V-50Hz	R290	1814	1680	E 5 40°C 40%
									R452A*	1235	1510	E 5 40°C 40%


*opcional- optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

We reserve the right to change specifications without prior notice.

- Exterior en acero AISI-304 excepto el respaldo
- Interior en acero AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Contrapuerta inox embutida
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Ruedas de serie (2 con freno + 2 sin freno)
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo : 40°C

- AISI-304 Stainless steel exterior, rear side galvanized panel
- AISI-304 Stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Inner side of doors by stamped steel
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature: : 40°C

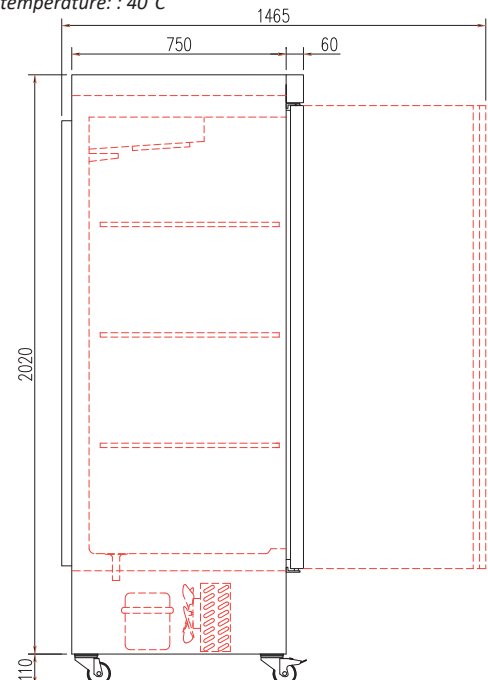

OPCIONES	OPTIONS
parrilla adicional	extra shelf
cerradura puerta	door lock
barras carniceras	bars for meat set
set 4 patas	4 legs set
set 6 patas	6 legs set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)

all photos must be considered as a reference - fotografías no contractuales



UPR-27



UPR-55