



UPR-27G
UPL-27G



UPR-55G
UPL-55G



UPR-82G
UPL-82G



mod.	rango range	largo length (mm) (inch)	alto height (mm) (inch)	fondo depth (mm) (inch)	estantes shelves GN 2/1	volumen capacity (L)	voltaje voltage	refrigerante refrigerant	potencia frig. frig. power W	potencia power W	clase climate 2015/1094 EN16825	
UPR-27G	-2°C +8°C	28°F 46°F	660 26	2160 85 1/32	845 33 1/4	4	645	230V-50Hz	R134a*	245	264	4 30°C 55%
									R290	502	260	5 40°C 40%
UPR-55G	-2°C +8°C	28°F 46°F	1350 56 1/16	2160 85 1/32	845 33 1/4	4	645	230V-50Hz	R452*	452	627	4 30°C 55%
									R290	606	560	4 30°C 55%
UPR-82G	-2°C +8°C	28°F 46°F	2055 81	2160 85 1/32	845 33 1/4	8	1282	230V-50Hz	R134a*	485	461	4 30°C 55%
									R290	845	396	4 30°C 55%
UPL-27-G	-20°C -15°C	-4°F +5°F	660 26	2160 85 1/32	845 33 1/4	8	1282	230V-50Hz	R452A*	1042	1010	4 30°C 55%
									R290	907	902	4 30°C 55%
UPL-55-G	-20°C -15°C	-4°F +5°F	1350 56 1/16	2160 85 1/32	845 33 1/4	12	2167	230V-50Hz	R290	1702	943	4 30°C 55%
									R452A*	1215	932	4 30°C 55%
UPL-82G	-20°C -15°C	-4°F +5°F	2055 81	2160 85 1/32	845 33 1/4	12	2167	230V-50Hz	R290	1814	1726	4 30°C 55%
									R452A*	1235	1556	4 30°C 55%


*opcional- optional

Características técnicas y constructivas sujetas a variación sin previo aviso.

- Exterior en acero AISI-304 excepto el respaldo
- Interior en acero AISI-304, con aristas curvas y fondo embutido
- Puertas de apertura reversible, con sistema de cierre automático y burlete magnético (permanece abierta al superar los 90° de apertura)
- Doble cristal
- Luz interior LED
- Estantes interiores de alambre en acero plastificado, regulables en altura
- Ruedas de serie (2 con freno + 2 sin freno)
- Cuadro de mandos y rejilla ventilación motor, desmontables
- Unidad condensadora ventilada
- Evaporador sistema tiro forzado, con recubrimiento epoxi anticorrosión
- Paro ventiladores tiro forzado al abrir la puerta
- Evaporación automática del agua de descarche
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Control digital de temperatura, descarches optimizados, alarma por alta temperatura de condensación. Eficiente gestión del consumo de energía
- Temperatura de trabajo : 32°C

We reserve the right to change specifications without prior notice.

- AISI-304 Stainless steel exterior, rear side galvanized panel
- AISI-304 Stainless steel interior, stamped bottom and rounded corners
- Doors with self closing system, blocked opening, magnetic gasket and possibility of changing the opening sense
- Double glazed door
- LED lighting
- Shelves made of plasticized steel wire, height adjustable
- Castors as standard (2 with brakes + 2 without)
- Control panel and engine ventilation grill, removable
- Fan assisted condenser unit
- Fan assisted evaporator, with epoxi anticorrosion coating
- Evaporator fan stops when door is opened
- Automatic evaporation of defrost water
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Digital temperature control, optimized defrost, high-temperature condensation alarm. Efficient management of energy consumption
- Operating temperature: : 32°C

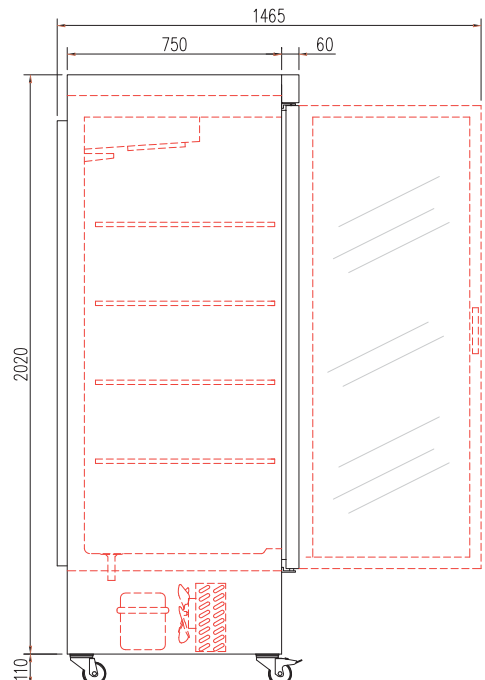

OPCIONES	OPTIONS
parrilla adicional	extra shelf
cerradura puerta	door lock
barras carniceras	bars for meat set
set 4 patas	4 legs set
set 6 patas	6 legs set
registrador de alarmas HACCP	HACCP alarm recorder
respaldo inox	stainless steel rear side
tropicalizado 43°C	tropicalized to 43°C
230v 60Hz / 115v 60Hz	230v 60Hz / 115v 60Hz
cambio R290 por R134a (+)	R290 to R134a (+)
cambio R290 por R452A (-)	R290 to R452A (-)



all photos must be considered as a reference - fotografías no contractuales



UPR-27G



UPR-55G

