



CPRO-60



CPRO-90



CPROH-60



CPROH-90

mod.	Largo Length (mm)	Alto Height TDA (m ²)	Fondo Depth (uds)	Capacidad Capacity (L)	Estantes Shelves (°C)	potencia frig. frig. power (W)	consumo consumption (W)	refrigerante refrigerant
CPRO-60	640	1540	640	200	2+1	967	1370	R290
CPRO-90	915	1540	640	288	2+1	1263	1613	R290
CPROH-60	640	1965	640	356	4+1	967	1382	R290
CPROH-90	915	1965	640	406	4+1	1263	1667	R290



MULTIDECK DISPLAY • VITRINAS MURALES

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

- Exterior en acero plastificado gris
- Interior en acero acabado epoxy blanco
- Diseñados para bebidas y productos envasados
- Estantes de acero plastificado regulables en altura y ángulo, con portaprecios
- Costados con **doble cristal templado**
- De serie: Luz horizontal, vertical y cortina nocturna
- Iluminación LED 6500 K,
- Control digital de temperatura y descarches
- Evaporación y condensación ventilada
- Aislamiento de poliuretano inyectado, libre CFCs, densidad 40 Kg/m³
- Evaporación automática del agua de descarche
- Clase climática 3 (25°C 60%HR) régimen M1, temperatura producto -1/5°C UNE EN ISO 23953-2:2006
- Tensión monofásica 230V 50/60 Hz

- Exterior in plasticised steel gray
- Epoxy finished steel interior white
- Designed for beverages and packaged
- Plastic coated steel shelves adjustable in height and angle , with price holders
- Sides **tempered double glazed**
- Standard: horizontal and vertical lighting and night curtain
- 6500 K LED lighting
- Digital temperature control and defrost
- Ventilated evaporation and condensation
- Insulation: Polyurethane, CFC, density 40 Kg / m³
- Automatic evaporation of defrost water
- Climatic class 3 (25°C 60%HR) regime M1, product temperature -1/5°C UNE EN ISO 23953-2:2006
- Voltage 230V 50/60 Hz

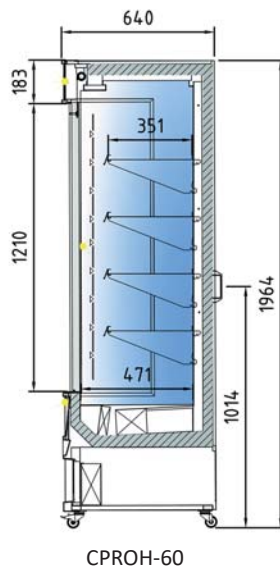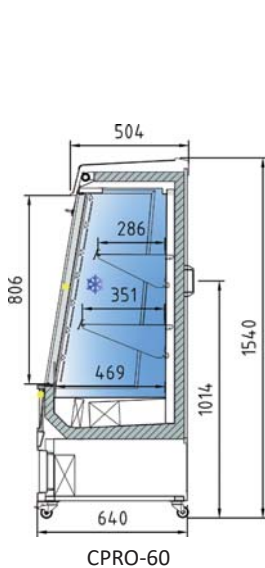

all photos must be considered as a reference - fotografías no contractuales



CPRO-90



CPROH-60