



CMI-5-70
CMI-5-100
CMI-5-125
CMI-5-150
CMI-5-190
CMI-5-240
CM I-5-290

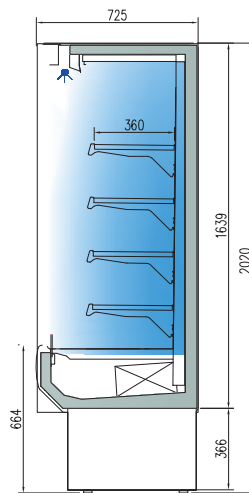

CMI-6-70
CMI-6-100
CMI-6-125
CMI-6-150
CMI-6-190
CMI-6-240
CMI-6-290

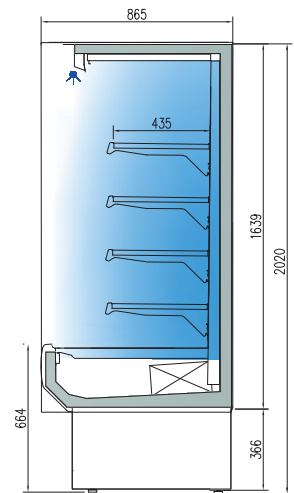

CMI-8-70
CMI-8-100
CMI-8-125
CMI-8-150
CMI-8-190
CMI-8-240
CMI-8-290

MULTIDECK DISPLAY • VITRINAS MURALES

mod.	largo length (mm)	exposición display TDA (m ²) CMI-5	exposición display TDA (m ²) CMI-6	exposición display TDA (m ²) CMI-8	estantes shelves (uds) CMI-5-6-8	potencia frig. frig. power (W) CMI-5-6-8	consumo. consumption (W) CMI-5-6-8	refrigerante refrigerant	rango range (°C)
CMI-70	680	0,78	0,83	0,86	4	1315	1559	R449A	-1 +5
CMI-100	970	1,14	1,22	1,26	4	1497	1797	R449A	-1 +5
CMI-125	1220	1,45	1,56	1,6	4	1497	1800	R449A	-1 +5
CMI-150	1480	1,78	1,91	1,96	4	2963	2667	R449A	-1 +5
CMI-190	1880	2,28	2,45	2,52	8	2963	2698	R449A	-1 +5
CMI-240	2380	2,9	3,12	3,21	8	2994	3600	R449A	-1 +5
CMI-290	2900	3,56	3,82	3,92	8	5906	5333	R449A	-1 +5

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

Vitrinas polivalentes, preparadas para carnes, lácteos y verduras regulando parámetros de la centralita digital

- Exterior e interior en acero inox AISI-304, con cristal lateral
- Costados de 30 mm con **cristal doble templado**
- Perfilera en aluminio anodizado
- Paragolpes en la parte delantera
- Estantes regulables en altura y ángulo, con porta-precios
- **De serie:** luz superior y cortina nocturna
- Iluminación LED 6500 K, opción LED 3000 K (luz cálida) o ROSA, al mismo precio
- Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
- Evaporador ventilado, con tratamiento EPOXY anti-corrosión de serie
- Descarche automático con evaporación automática
- Condensación ventilada
- Control electrónico de temperatura
- Indicador de temperatura
- Clase climática 3 (25°C 60%) régimen M1

M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

All multideck are versatile and changing digital control parameters, are ready for meat, milk products and vegetables

- AISI 304 exterior and interior, with glass sides
- 30 mm thicknes sides with **tempered double glazed**
- Anodised aluminium profiles
- Front rubber bumper
- Height and angle adjustable shelves, with labels holder
- **Standard:** horizontal top lighting and night curtain
- 6500 K LED lighting, optional 3000 K LED (soft light) or PINK, same price
- 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
- Ventilated evaporator, with EPOXY anticorrosion cover as sta dard
- Auto defrost and automatic evaporation
- Ventilated condensation
- Electronic temperature controller
- External thermometer
- Climate class 3 (25°C 60%) regime M1

M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

OPCIONES OPTIONS	luz extra LED x estante extra lighting x shelf	pre-instalación remote condenser unit
CM-70		
CM-100		
CM-125		
CM-150		
CM-190		
CM-240		
CM-290		

Versión REMOTO, incluye válvula de expansión (R449A) y válvula solenoide
 REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora MURAL INOX serie 5 - 6 - 8
5 - 6 - 8 series MULTIDECK INOX display

8

all photos must be considered as a reference - fotografías no contractuales



Eficiencia energética - Energy efficiency

Puertas cristal opcionales
Optional glass doors

CMI-6-100