

CM-5-70-LC	CMI-5-70-LC
CM-5-100-LC	CMI-5-100-LC
CM-5-125-LC	CMI-5-125-LC
CM-5-150-LC	CMI-5-150-LC
CM-5-190-LC	CMI-5-190-LC
CM-5-240-LC	CMI-5-240-LC

CM-6-70-LC	CMI-6-70-LC
CM-6-100-LC	CMI-6-100-LC
CM-6-125-LC	CMI-6-125-LC
CM-6-150-LC	CMI-6-150-LC
CM-6-190-LC	CMI-6-190-LC
CM-6-240-LC	CMI-6-240-LC

CM-8-70-LC	CMI-8-70-LC
CM-8-100-LC	CMI-8-100-LC
CM-8-125-LC	CMI-8-125-LC
CM-8-150-LC	CMI-8-150-LC
CM-8-190-LC	CMI-8-190-LC
CM-8-240-LC	CMI-8-240-LC

mod.	largo length (mm)	exposición dsplay TDA (m ²)	exposición dsplay TDA (m ²)	exposición dsplay TDA (m ²)	estantes shelves (uds)	potencia frig. frig. power (W)	consumo. consumption (W)	refrigerante refrigerant	rango range (°C)
		CMI-5	CMI-6	CMI-8	CMI-5-6-8	CMI-5-6-8	CMI-5-6-8	CMI-5-6-8	
CMI-70	680	0,78	0,83	0,86	4	1315	1559	R449A	-1 +5
CMI-100	970	1,14	1,22	1,26	4	1497	1797	R449A	-1 +5
CMI-125	1220	1,45	1,56	1,6	4	1497	1800	R449A	-1 +5
CMI-150	1480	1,78	1,91	1,96	4	2963	2667	R449A	-1 +5
CMI-190	1880	2,28	2,45	2,52	8	2963	2698	R449A	-1 +5
CMI-240	2380	2,9	3,12	3,21	8	2994	3600	R449A	-1 +5
CMI-290	2900	3,56	3,82	3,92	8	5906	5333	R449A	-1 +5

características técnicas y constructivas sujetas a variación sin previo aviso

we reserve the right to change specifications whitout prior notice

Vitrinas polivalentes, preparadas para carnes, lácteos y verduras regulando parámetros de la centralita digital

- **CM:** Exterior en chapa de acero plastificado, interior en chapa de acero con acabado epoxi y espejos en la cara interior
 - **CMI:** Exterior e interior en acero inox AISI-304, con espejos en la cara interior
 - **De serie:** luz superior, cortina nocturna y espejos laterales
 - Iluminación LED 6500 K, opción LED 3000 K (luz cálida) o ROSA, al mismo precio
 - **Opcional:** persiana de aluminio, con accionamiento **manual** y **cerradura**
 - Costados de 30 mm
 - Perfilera en aluminio anodizado
 - Paragolpes en la parte delantera
 - Estantes regulables en altura y ángulo (100 Kg/m²), con porta-precios
 - Aislamiento de poliuretano inyectado, densidad 40 Kg/m³, cero efectos ODP y GWP
 - Evaporador ventilado, con tratamiento EPOXY anti-corrosión de serie
 - Descarche automático con evaporación automática
 - Condensación ventilada
 - Control electrónico de temperatura
 - Indicador de temperatura
 - Clase climática 3 (25°C 60%) régimen M1
- M1 temperatura producto -1/+5°C UNE-EN ISO 23953-2:2006

All multideck are versatile and changing digital control parameters, are ready for meat, milk products and vegetables

- **CM:** Laminated steel plate exterior, epoxy finished steel plate interior with side mirrors
 - **CMI:** AISI 304 exterior and interior, with side mirrors
 - **Standard:** horizontal top lighting and night curtain
 - 6500 K LED lighting, optional 3000 K LED (soft light) or PINK, same price
 - **Optional:** Aluminium shutter, with **lock** and **manual drive**
 - 30 mm thickness sides
 - Anodised aluminium profiles
 - Front rubber bumper
 - Height and angle adjustable shelves (100 Kg/m²), with labels holder
 - 40 Kg/m³ density polyurethane insulation, zero ODP and GWP
 - Ventilated evaporator, with EPOXY anticorrosion cover as standard
 - Auto defrost and automatic evaporation
 - Ventilated condensation
 - Electronic temperature controller
 - External thermometer
 - Climate class 3 (25°C 60%) regime M1
- M1 product temperature -1/+5°C UNE-EN ISO 23953-2:2006

OPCIONES	interior negro	persiana	luz extra LED x estante	pre-instalación
OPTIONS	black interior	shutter	extra lighting x shelf	remote condenser unit

CM-70-LC
CM-100-LC
CM-125-LC
CM-150-LC
CM-190-LC
CM-240-LC
CM-290-LC

Versión REMOTO, incluye válvula de expansión (R449A) y válvula solenoide
REMOTE version, expansion valve (R449A) and solenoid valve, included

220v 60Hz / 115v 60Hz consultar - consult

Vitrina expositora MURAL serie 5 - 6 - 8 LC

5 - 6 - 8 LC series MULTIDECK display

8

fotos must be considered as a reference - fotografías no contractuales


Colores opcionales, incluidos en precio
Optional colors, free of charge



Espejo
Mirror



Detalle persiana
Shutter detail

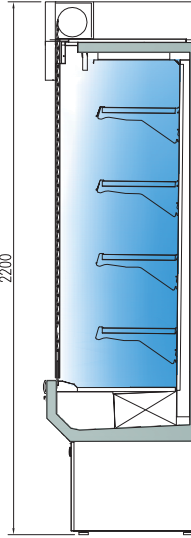

CMI-6-100-LC



CM-6-100-LC
Con persiana
With shutter